




## FLDI AIRCRAFT WING DRAIN UNIT

Référence : FLVAA

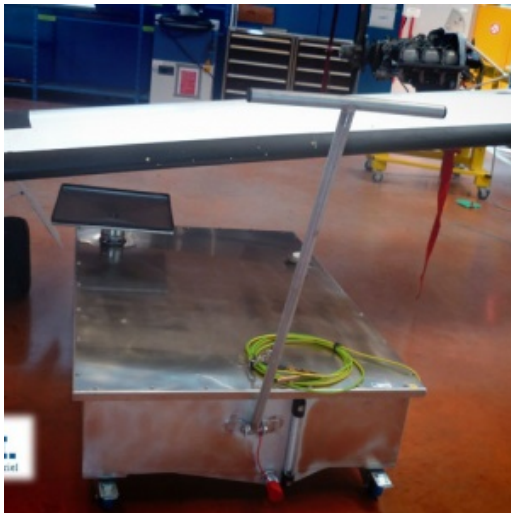

**Adjustable funnel:** The funnel must be positioned vertically above the drain valve. This funnel is supported by a sliding tube and a ball joint which allow it to be adjusted to the shape of the wing. In order to avoid splashing. The purge is done by gravity.

**Reuse of gasoline:** When the two tanks of the aircraft are empty, the operator moves the bins to the transfer area and uses the pneumatic pump located on the cart to transfer the fuel to the tank. This way the gasoline can be reused.

**Safety:** The assembly is equipped, in order to eliminate any risk of sparks, with equipotential bonds. Before any use, the operator must connect the equipment to the aircraft using earth clamps. The only energy needed is compressed air.